


Data Sheet
Conductive fabric - PO.NI

Name PO.NI
Description Nickel coated fabric

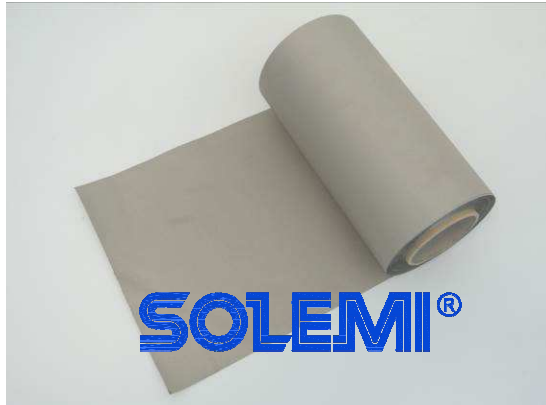

Type of raw material Polyester fabric
Thickness (mm) 0,15 +/-0,05
Max Surface resistivity (Ohm/sq) 0,4
Temperature range (°C) -40 to 90
Maximum weight (g/mq) 80
Flammability rating NA
Typical shielding effectiveness 80 dB from 1 MHz to 100 MHz
60 dB from 100 MHz to 1 GHz
Additional coating NA
Product applications Base material for room shielding, base material for EMI/RFI